

# Versatile Applications In Various Settings


## SEMI-OUTDOOR DISPLAY VX30MF



Retail



Restaurant

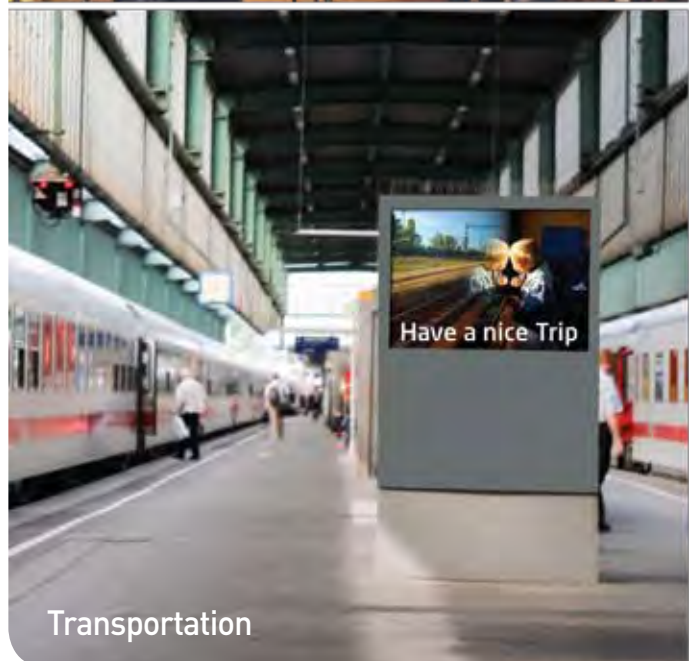


Transportation



Bank & Post office


### SHINE-OUT

Perfect fit for window display by reflecting away the sunlight for best image visibility and clearer display under direct sunlight than conventional panel.

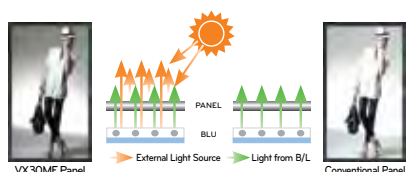


### NO BLACKENING DEFECT

Even under direct sunlight exposure, LG commercial monitors that adopted LGD panel remain free of blackening defects and provides superior quality for semi-outdoor usage.

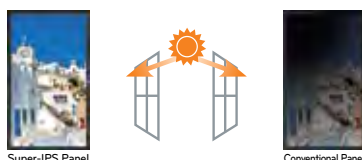

### FRONT COVERLESS OPEN FRAME

VX30MF fits to any customer need and circumstance with its open frame. It can be designed according to customer request at an affordable price.



# SEMI-OUTDOOR DISPLAY

## VX30MF




- Versatile applications in various settings
- High Visibility
- Reliability
- Easy to customize



### FEATURES

- Panel Size : 47"
- Panel Technology : Super IPS
- Front cover less Open frame
- Slim Bezel : 11mm
- Brightness : 700nit
- Shine-Out → High Visibility
- No Blackening Defect
- Power Consumption : 260W(Typ)

### DIMENSION

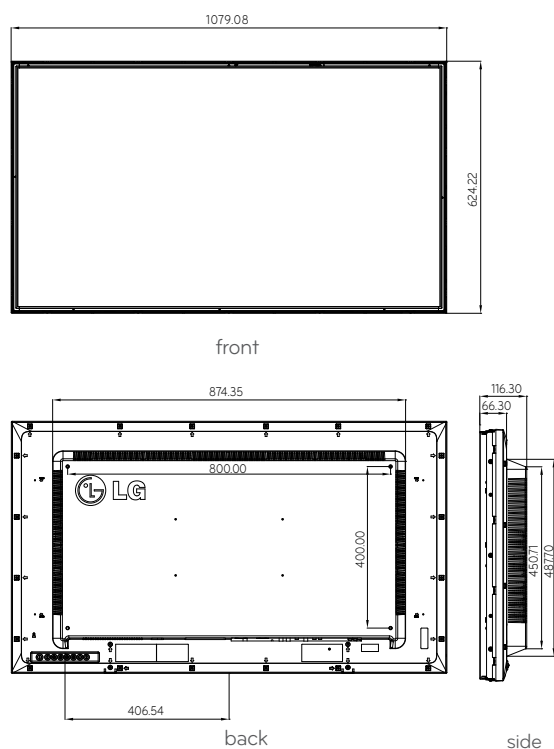

### SPECIFICATIONS

VX30MF

PANEL	Screen Size	47"
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	1920 x 1080 (FHD)
	Brightness	700cd/m <sup>2</sup>
	Contrast Ratio	1,200:1
	Dynamic CR	3,000:1
	Viewing Angle(H x V)	178 x 178
	Response Time	9 ms(G to G)
CONNECTIVITY	Input (Rear)	
	Digital	HDMI/DVI with HDCP
	Analog	Component(BNC), Composite(BNC), RGB
	Audio	RGB/DVI Audio, Component Audio(RCA), Composite Audio(RCA)
	External Control	RS232C, RJ45
	USB	Yes (X1)
	Output (Rear)	
	Digital	No
	Analog	RGB, Composite(BNC)
PHYSICAL SPECIFICATION	Audio	Composite Audio(RCA)
	External Control	RS232C
	Bezel Width	11mm (Panel)
	Monitor Dimension(W x H x D)	1079.0cm X 62.42cm X 11.63cm
	Weight(head)	21.5kg (47.4 lb)
SPECIAL FEATURES	Packed Weight	25.55kg (56.32lb)
	VESA™ Standard Mount Interface	800 x 400
ENVIRONMENT CONDITIONS	Additional	Shine-Out, Front coverless Open frame
	Operation Temperature	0°C ~ 40°C
POWER	Operation Humidity	10% ~ 80%
	Power Supply	100-240V~, 50/60Hz
	Power Consumption	
	Typical	260W
STANDARD(CERTIFICATION)	DPMS	1W(RGB), 2W(HDMI) (LAN Off Condition)
	Power Off	0.5W
	Safety	No (Should be qualified by set/ kiosk maker)
MEDIA PLAYER COMPATIBILITY	EMC	No (Should be qualified by set/ kiosk maker)
	ErP / Energy Star	No (Should be qualified by set/ kiosk maker)
	Slot PC compatible (optional)	No
SOFTWARE COMPATIBILITY	External Media player Attachable	Yes
	Supersign Compatibility	Elite-s
ACCESSORY	Included	Remocon, Power Cable, D-sub Cable, CD Manual
	Optional	No

※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.