





SPINETIX

DiVA

All-in-One Digital Signage.

Create. Schedule.

Built-in web-based tools with
ready to use Playouts and Apps
for a single horizontal or vertical screen.

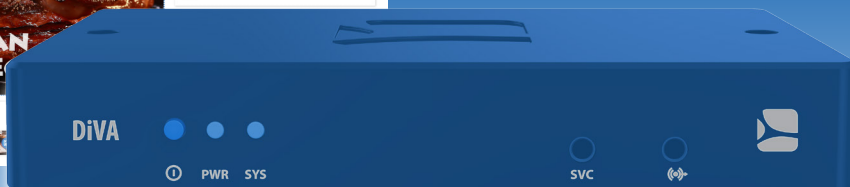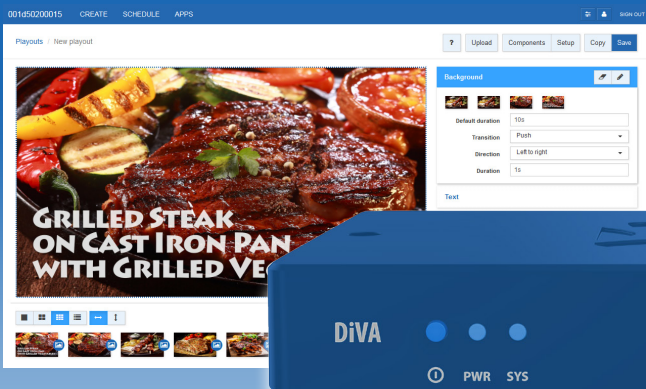

Tech Specs



Connectors & Ports

Video	HDMI
Audio	Line level, stereo
USB port	2x USB 2.0
Network	Ethernet 1GbE, IEEE 802.3ab, IEEE 802.3u, IEEE 802.3az
Power Supply	Input: 100-240V, 50-60Hz Output: 5V DC 3.6A max.

Size & Weight

Size	Width: 5.9 / 150mm" Height: 0.9 / 23mm" Depth: 3.4 / 86.5mm"
Weight	12.3oz / 350g

Player Engine

Layer composition	Background plus non-overlapping zones
Animation	Built-in playouts, apps
Text	Unicode support (international text) Bidirectional (right-to-left, left-to-right)
Fonts	Built-in fonts (Western, Cyrillic, Arabic, Greek, Hebrew, Chinese, Japanese, Korean, Thai, Hindi, etc.)

Formats

Images	JPEG, PNG
Media file formats	MPG, MP4, M4A, MOV, WMV
Video codecs	Multi-video decoding capable, 1080p max H.264/MPEG-4 AVC: HP@L4 MPEG-2: MP@HL MPEG-4: ASP WM9/VC-1: AP@L3
Audio codecs	AAC-LC, HE-AAC MPEG Layer I, II, III (MP3) WMAv2 AC3
Data feeds	Built-in RSS app

Display

Aspect ratio	16:9 Horizontal, vertical
Resolution	1080p (1920x1080), 720p (1280x720) at 50/60 Hz
Power on/off	DVI, HDMI-CEC

Network

Protocols	DHCP, static IP, Zeroconf IPv4, IPv6 Bonjour HTTP
Remote configuration	Built-in HTTP server, RPC
Content transfer	Web browser upload

Storage

Internal	8GB solid state
External	Flash drive, hard disk (via USB 2.0)

Characteristics

Processor	DaVinci DM8148 (ARM Cortex-A8 Core 1GHz)
Memory	RAM: 1 GB, DDR3-1066 Bandwidth: 4.3GB/s
Power consumption	8W
Operating conditions	Ambient temperature 32 - 104°F / 0 - 40°C Relative humidity 10-90% noncondensing Altitude 10,000ft / 3,000m max.
Storage temperature	-4 - 122°F / -20 - 50°C
Real-time clock (RTC)	Accuracy ±1 min./month Backup by supercap (40 days)

Tools

Built-in web-based content creation and scheduling tools

Warranty

3 Year Limited Hardware Warranty