

Monitor LCD da 47" LG con integrato il touch screen!




Nasce finalmente il monitor touch screen per applicazioni professionali. I tecnici di AVstore in collaborazione con LG Electronics sono oggi in grado di rendere sensibili al tocco i display LCD della serie professionale. Disponibile da oggi è la versione da 47 pollici di diagonale, ma a breve seguiranno i tagli da 32", 42" e 52".

Senza modificare l'estetica del display e con l'aggiunta di un vetro protettivo da 2 mm, è quindi possibile trasformare in touch screen i monitor di grande formato mantenendo intatto il look pulito ed essenziale di LG.

La nuova serie di monitor touch screen è l'ideale per le vostre installazioni interattive in musei, fiere, luoghi pubblici, negozi e supermercati. Basta con i montaggi improvvisati: affidati ad una soluzione professionale.

Manda una email ad enquiry@avstore.tv per avere una quotazione.

Specifiche Tecniche M4710C-touch*

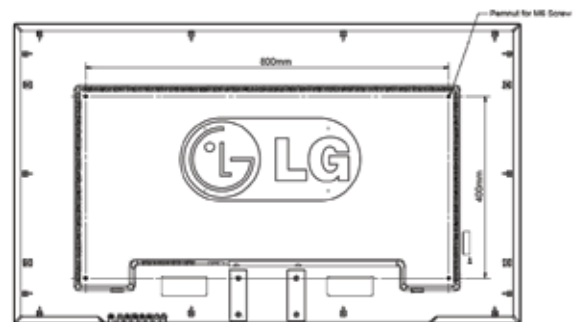

TOUCH SCREEN

Input Method: Finger and stylus input
Accuracy: Better than 99% accuracy
Touch System Resolution: 16k x 16k
Response Time: 20 ms for tap input
Minimum Touch Impact: 50 mN-s (milli-newton seconds), the equivalent of a very light touch
Light Transmission: 92% light transmission (±2%)
Surface Finish: Anti-glare etch
Glass Thickness: 2.2 mm (± 0.2 mm), glass only
Substrate Material: Chemically-strengthened glass substrate.
Surface Hardness: Mohs pick with a hardness rating of 7 or higher is required to induce a scratch. Scratches will not result in a functional failure.
Cleaning: Standard, non-abrasive glass cleaners acceptable.
Surface Obstructions: Touch screen operation withstands surface contaminants such as dirt, dust and grime.
Communications Protocol: USB HID
Software: simple calibration and set-up with Windows 98, NT, 2000, XP and Linux.

PANEL

LCD Panel Type 47"
Aspect Ratio 16:9
Native Resolution 1366 x 768 (WXGA); FULL-HD upon request
Brightness 500 cd/m²
Contrast Ratio 1600:1
Viewing Angle (HxV) 178x178
Response Time 8 ms (G to G)
MTBF 50,000 Hr. (Minimum)

VIDEO

Max Input Resolution 1600 x 1200@60Hz (Analog)
1280 x 1024@60Hz (Digital)
Recommended Resolution 1360 x 768@60Hz (Analog/Digital)
H-Scanning Frequency 30~83kHz (Analog/Digital)
V-Scanning Frequency 56~75Hz
Pixel Frequency 165MHz (D-Sub)/135MHz (HDMI/DVI)
Sync Compatibility Separate/Composite/SOG
Video Input RGB Analog/Digital
Cinema 3:2/2:2 mode Yes
Aspect Ratio Correction Spectacle/Full/Original/4:3/16:9/14:9/Zoom

REAR JACK PACK

Component Video 2 Hi-Res (BNC)
PC Input via 15-Pin Sub "D" 1/1 (RGB)
Input/Output
Composite Video Input/Output 1/1
Audio Output 1
Audio Inputs 3 Plus PC Sound
HDTV Formats 720p/1080i
PC Formats Auto Scaling to XGA
HDMI/HDCP Yes (HDMI to DVI cable not included)
RS-232C Input/Output 1 (Service/Control)/1
S-Video 1 (S-Video has a priority but there is no input mode)
Audio Jack Built-in (No Amp) Yes
Discrete IR Input Yes
External Speaker Jack Out Yes

AUDIO

Surround MAX Yes
Auto Volume Limiter Yes
Audio Power 20W (10Wx2)
Bass/Treble/Balance Yes
SSM Flat/Music/Movie/Sports/User

SPECIAL FEATURES

Temperature Sensor Yes
Lamp Fault Sensor Yes
Split Zoom (Self Video Wall, Max 4x4) Yes
(Adjusts for Bezel Width)
Power indicator/Logo light Yes
Low Power Yes, Good/Better/Best

CABINET

Color Black
Monitor Dimension (WxHxD) 43.98" x 26.02" x 4.67"
Weight 66.4 Lbs.
Carton Dimensions (WxHxD) 47.2" x 29.45" x 11.30"
VESATM Standard Mount Interface 800 x 400

POWER

Power Supply 100-240V~, 50/60Hz
Normal 300W

* Add 0.3"(7.5 mm) for monitor depth including touch screen interface